




6-QW-32(280)-L (12V32Ah)



Dimensions (mm)

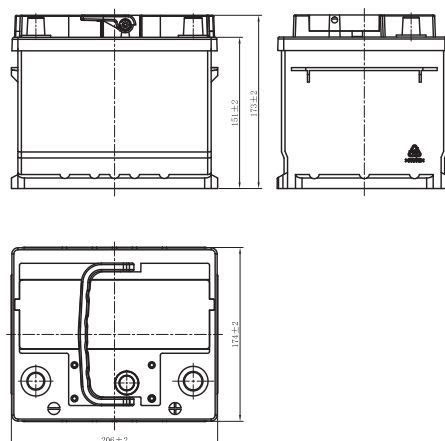


Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		32Ah
Dimension	Length	206±2mm(8.11inches)
	Width	174 ±2mm(6.85inches)
	Container Height	173 ±2mm(6.81inches)
	Total Height(with Terminal)	173±2mm(6.81inches)
Weight		Approx 10.0Kg(22.1lbs)
Acid		1.280±0.015g/cm ³ (25°C)
Standard Terminal		1
Cell layout		0
Hold-Down		B13
Cell plate qty		/
Case		Black-PP Material
Cover		Black-PP Material
Handle		Black-PP Material
QTY/PLT/layer		/

Electrical Specification

Rated Capacity	20 hour rate(1.6A)	32Ah
Reserve Capacity		47min
Cold Cranking Performance Amps@0°F(-18°C)		280A



Discharge Characteristics(25°C,70°F)

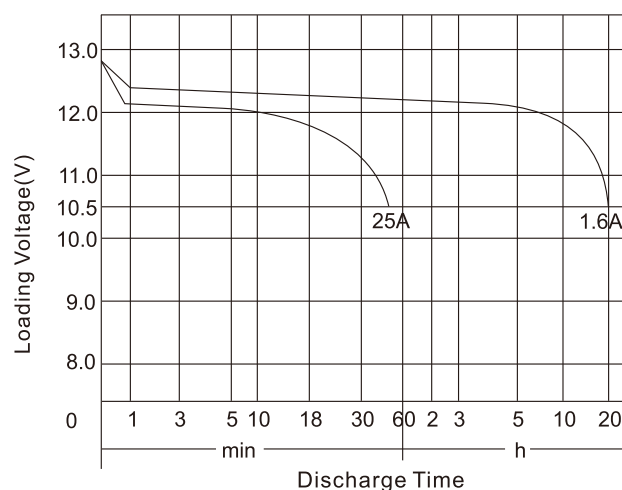

Standard Terminal (mm)


Cell Layout

Terminal Type	D	
	Positive	Negative
1	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}



Figure(0)

Discharge Characteristics(-18°C,0°F)

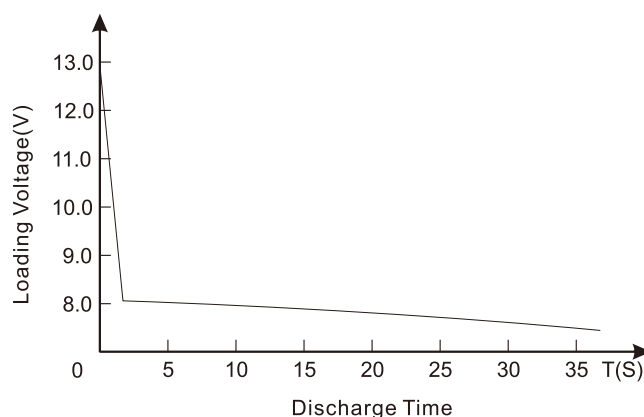

*Values are subject to variation of +/- 5% in normal manufacturing processes.
*Technical specifications and the product line above could be changed without prior notice.